

PRODUCT



in cooperation with



Please note: this datasheet only applies to the UK and Ireland.

BENEFITS

- Top charging / discharging performance (up to 1.1 kW per kWh)
- High level Solarwatt safety
- Exclusive BMW design
- Data stored on European servers

¹⁾ The warranty conditions for SOLARWATT Battery vision (en-UK/IRL) apply.

SOLARWATT Battery vision (three phase version)

Inverter vision three 1.0

Battery vision top pack 1.0 (2.6 kWh)

Battery vision pack 1.0 (2.6 kWh)

Battery vision, Solarwatt's powerful battery system: the three phase version of Battery vision consists of Inverter vision three and Battery vision packs. The components are perfectly matched and guarantee optimum efficiency. The modular design can be flexibly adapted to many customer requirements.

- 7.8 to 18.2 kWh usable energy
- Clustering of up to 10 systems possible with the Battery vision clusterbox
- Can be installed as DC- or AC-battery, suitable for both new installations and retrofittable to existing PV systems
- Can be installed indoors and outdoors
- Backup power functionality
- Fulfills the requirements of the 'Safety guidelines for Li-ion household battery systems' and the European battery regulation

Battery vision was developed for sector coupling:

An EV charger, heat pump or other devices can be easily connected, reducing energy costs. The SOLARWATT Manager controls charging and discharging to ensure an optimal use of the available PV power and / or time-variable power grid tariffs.

Solarwatt also features a single-phase version of Inverter vision which can be used with the same battery packs. Documentation is available as a separate datasheet.

SERVICE

Warranty¹⁾

12 years performance warranty on Battery vision packs
10 years product warranty on Inverter & Battery packs
Warranty requires online activation. Installation & removal costs covered in the event of a claim

Simple return policy

as per electrical and electronic equipment legislation

Sales & Service

support available from the local team

SOLARWATT Manager ready

perfect system integration for sector coupling

BATTERY VISION TOP PACK 1.0		BATTERY VISION PACK 1.0	
Cell Technology	LiFePO ₄		
Total energy capacity	2.9 kWh		
Usable energy	2.6 kWh		
Usable energy capacity	45 Ah		
Nominal voltage	57.6 V _{DC}		
Voltage range	52.2 - 65.7 V _{DC}		
Max. charge/discharge current	50 A / 50 A		
Number of battery modules per system	3 to 7 in series		
Temperature behaviour during charging	Optimal charging: between 20 and 45 °C Restricted charging: between 46 and 55 °C and between 19 and 4 °C Operation in winter mode: from 3 to 0 °C only at SoC >60% ¹⁾		
Temperature behaviour during discharging	Optimal discharging: between 20 and 45 °C Restricted discharging: between 46 and 55 °C and between 19 and 4 °C Operation in winter mode: from 3 to -10 °C only at SoC >65% ¹⁾		
Storage and ambient temperature	-20 °C to +55 °C		
Cooling method	passive cooling system for silent operation		
Relative humidity	≤ 100 % (outdoor)		
Maximum efficiency	> 95 % (round trip efficiency)		
IP rating	IP65 (indoor/outdoor)		
Connectors ²⁾	Power plug & socket with integrated communication (touch-proof and reverse polarity protected)		
Interface	Data, DC, Ground	Ground	
Display	Status LED, SoC LED, BMS LED	Status LED	
Supported devices	SOLARWATT Inverter vision one 1.0, SOLARWATT Inverter vision three 1.0		
Dimensions (W x H x D)	570 mm x 182 mm x 436 mm	570 mm x 120 mm x 436 mm	
Mass	39.5 kg	33.5 kg	
Housing	Robust metal enclosure		
Warranty ³⁾	12 years performance warranty, 10 years product warranty		
Cycles ⁴⁾	≥ 10,000		
DC switches	integrated (manually and automatically)		
Installation location	max. 2,000 m AMSL, indoor and outdoor		
Installation method	Floor stacking		
Battery module designation acc. to IEC 62620	IFPP/42/151/108/[(18S)XS]E/-10+50/95		

CERTIFICATIONS AND STANDARDS

Tested in accredited labs:

EN IEC 62619:2022 (VDE 0510-39)

EN 62477-1:2012 (VDE 0558-477-1)

UN 38.3

VDE-AR-E 2510-50 (Draft 2nd ed.) for battery alone

and in combination with inverter

Safety Guidelines for Li-ion household battery system, Version 1.0

KIT short checklist (full points)

EN 61000-6-2 (VDE 0839-6-2)

EN 61000-6-3 (VDE 0839-6-3)

VDE pre-standards for (EU) 2023/1542 (batteries regulation):

Art. 10 & Annex IV (Performance and Durability)

Art. 12 & Annex V (Safety of stationary battery energy storage systems)

Art. 14 & Annex VII (Information on state of health)

For CE and UKCA marking:

(EU) 2023/1542 (Batteries Regulation)

2014/35/EU (LVD)

2011/65/EU (ROHS) (voluntary)

2014/30/ EU (EMC)

In compliance with the product requirements in fire safety standards:

BVES Guidelines Preventive and protective fire security with large scale

lithium ion storage System, 2nd Ed. 2021 (Germany, only requirements that are

also applicable for residential storage systems)

OIB Richtlinie 2 (2023, Austria, no specific battery room required for indoor

installation of Battery vision)

PAS 63100:2024 (UK)

In general for all fire safety standards:

The system has passed the propagation test according to EN IEC 62619 cl.

7.3.3 (no fire outside the system, no enclosure rupture)

Cells also separately tested to following standards:

UN38.3 (Rev. 7)


EN IEC 62619:2022

EUCAR hazard level 3 (no venting, no fire, or flame; no rupture; no explosion.

Weight loss <50% of electrolyte weight)

UL 9540A (2019), UL 1642:2020 ed. 6, UL 1973:2018 (2nd ed.)

DIMENSIONS

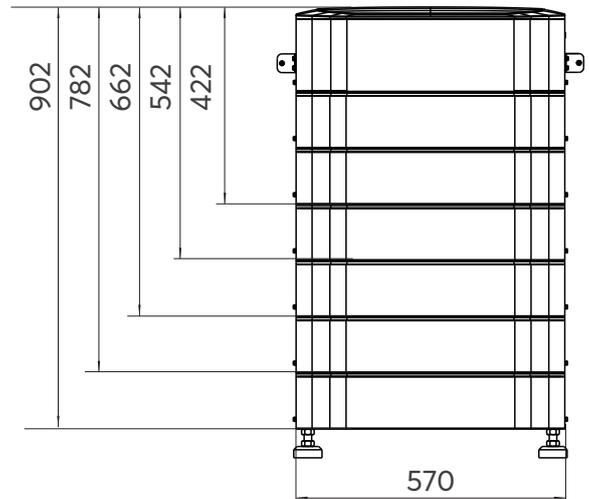

1) For further information on operation in winter mode, see the online manual.

2) The battery poles are voltage-free when the battery is removed.

3) The warranty conditions for SOLARWATT Battery vision (en-UK/IRL) apply.

4) Determined at the cell level under laboratory conditions at 25°C, 90% DoD, reduced charging current from 90% SoC

INVERTER VISION THREE 1.0	(5.0 kW)	(6.0 kW)	(8.0 kW)	(9.9 kW)	(10.0 kW)	(12.0 kW)	(15.0 kW)
DC							
Max. total PV output	11,000 Wp	14,000 Wp	18,000 Wp	20,000 Wp	20,000 Wp	24,000 Wp	30,000 Wp
Max. input power DC	11,000 W	13,200 W	17,600 W	18,000 W	18,000 W	22,500 W	22,500 W
MPPT A / MPPT B / MPPT C	10,000 / 10,000 / 10,000						
Max. input voltage	1,000 V						
Operating PV Voltage	90 V - 950 V						
Start-up input voltage	140 V						
Rated input voltage	620 V						
MPPT operating voltage range	120 V to 950 V						
Max. input current	20 A / 20 A / 20 A						
Max. short-circuit current	25 A / 25 A / 25 A						
No. of independent MPP trackers	3						
No. of strings per MPP tracker	1 + 1 + 1						
AC							
Max. AC Input Power	6,000 VA	7,200 VA	9,600 VA	12,000 VA	12,000 VA	14,400 VA	16,000 VA
Max. AC Input Current (per phase)	9.1 A	10.9 A	14.5 A	18.2 A	18.2 A	21.8 A	24.2 A
Rated Output Power	5,000 W	6,000 W	8,000 W	9,900 W	10,000 W	12,000 W	15,000 W
Max. Output Apparent Power	5,500 VA	6,600 VA	8,800 VA	9,900 VA	11,000 VA	13,200 VA	16,500 VA
Rated Output Current (per phase)	7.6 A	9.1 A	12.1 A	15.0 A	15.2 A	18.2 A	22.7 A
Max. Output Current (per phase)	8.3 A	10.0 A	13.3 A	15.0 A	16.7 A	20.0 A	25.0 A
Rated grid voltage	400/230 Vac; 380/220 Vac, 3L/N/PE						
Rated grid frequency	50 Hz / 60 Hz						
Power factor	1 (adjustable from 0.8 leading to 0.8 lagging)						
THDi	< 3 % @rated power						
Parallel operation	ten devices						
BACKUP							
Max. Output Apparent Power	5,000 VA	6,000 VA	8,000 VA	10,000 VA	10,000 VA	12,000 VA	15,000 VA
Peak Output Apparent Power (60s)	6,000 VA	7,200 VA	9,600 VA	12,000 VA	12,000 VA	14,400 VA	15,000 VA
Max. Current (per phase)	7.2 A	8.7 A	11.6 A	14.5 A	14.5 A	17.4 A	21.7 A
Rated output voltage	400/230 Vac; 380/220 Vac, 3L/N/PE						
Rated output frequency	50 Hz / 60 Hz						
Power factor	1 (adjustable from 0.8 leading to 0.8 lagging)						
THDv (linear load)	< 3 % @linear load						
Switch time	<10 ms at the backup terminal of the inverter, 1-30 s with Battery vision backup booster						
EFFICIENCY							
Euro Efficiency	97.2 %						
Max. Efficiency	98.2 %						
MAX. POWER BATTERY FOR CHARGING AND DISCHARGING							
3x Battery vision pack 7.8 kWh	6,000 W	7,200 W	9,600 W	9,850 W	9,850 W	9,850 W	9,850 W
4x Battery vision pack 10.4 kWh	6,000 W	7,200 W	9,600 W	12,000 W	12,000 W	13,100 W	13,100 W
5 to 7x Battery vision pack 13 to 18.2 kWh	6,000 W	7,200 W	9,600 W	12,000 W	12,000 W	14,400 W	15,000 W
POSSIBLE CONFIGURATIONS WITH SOLARWATT BATTERY VISION							
Qt. Battery vision top pack	1	1	1	1	1	1	1
Qt. Battery vision pack	2	3	4	4	5	6	6
Total energy capacity	8.6 kWh	11.5 kWh	14.4 kWh	14.4 kWh	17.3 kWh	20.2 kWh	20.2 kWh
Usable energy	7.8 kWh	10.4 kWh	13.0 kWh	13.0 kWh	15.6 kWh	18.2 kWh	18.2 kWh
Nom. voltage	172.8 Vdc	230.4 Vdc	288.0 Vdc	288.0 Vdc	345.6 Vdc	403.2 Vdc	403.2 Vdc
Voltage range	156.6 - 197.1 Vdc	208.8 - 262.8 Vdc	261.0 - 328.5 Vdc	261.0 - 328.5 Vdc	313.2 - 394.2 Vdc	365.4 - 459.9 Vdc	365.4 - 459.9 Vdc

GENERAL INFORMATION

Dimensions (WxHxD)	630 mm x 456 mm x 228 mm
Mass	33,5 kg
Installation	Wall mounted
Topology	Non-isolated
Cooling method	5.0 to 10.0 kW: natural 12.0 to 15.0 kW: fan cooling
Noise emission	5.0 to 12.0 kW: < 40 dB 15.0 kW: < 55 dB
Installation location	up to 4,000 m above sea level (derating exceeding 2.000 m)
Operating temperature	-25 °C to +60 °C (derating at +45°C)
Storage temperature	-40 °C to +70 °C
Relative humidity	≤ 100 % (outdoor)
IP rating	IP65
Standby consumption	20 W
Monitoring	Inverter: LC Display Pro app, Home app, Manager portal Data stored on European servers
Communication	LAN, Bluetooth, Wifi, RS485, USB
Warranty ¹⁾	10 years product warranty

BATTERY CONNECTION

Battery type	SOLARWATT Battery vision top pack 1.0 SOLARWATT Battery vision pack 1.0
Battery voltage	150 to 800 V
Max. charge/discharge Current	50 A
Communication interface	CAN (communication with inverter, upgrade BMS)

CERTIFICATIONS AND STANDARDS

EN 62109-1:2011 (VDE 0126-14-1)
EN 62109-2:2011 (VDE 0126-14-1)
EN 61000-6-2 (VDE 0839-6-2)
EN 61000-6-3 (VDE 0839-6-3)
EN IEC 63000:2019

In compliance with EU and UK directives and regulations (CE/UKCA)

2014/35/EU (LVD)
2011/65/EU (RoHS) (voluntary)
2014/30/ EU (EMC)
2014/53/EU (RED)

Grid codes:

VDE-AR-N 4105:2018
TOR Erzeuger Typ A, OVE-Richtlinie R25:2020
CEI 0-21: 2022-03 , CEI 0-21:V1 2022-11, CEI 0-21:V2 2024-01,
CEI 0-21:V2/EC 2024-03
EREC G98-1:2022 Amentment 7, G99-1:2022 Amendment, G100:2022 Amendment 2
UNE 217001:2020, 217002:2020 (RD 647/2020)
EN 50549-1:2019
C10/11:2021

1) The warranty conditions for SOLARWATT Battery vision (en-UK/IRL) apply.
2) DTSU 666 is part of the scope of delivery of the Inverter vision three

PROTECTION

Insulation monitoring	yes
Residual current monitoring	yes
DC reverse polarity protection	yes
Battery reverse protection	yes
Anti-islanding protection	yes
AC short-circuit protection	yes
AC Overcurrent/ overvoltage protection	yes
Leakage current protection	yes
DC switch	yes
Battery wake-up function	yes
Overvoltage category	III
AC/DC overvoltage protection	AC: type II / DC: type II
Protection class	I
AFCI	yes




For information in accordance with the EU Data Act, scan the QR code or follow the link:
www.solarwatt.com/eu-data-act-en


SUPPORTED DEVICES

Meter	Meter DTSU 666 (Solarwatt version) ²⁾
Manager	SOLARWATT Manager flex 1.0 SOLARWATT Manager flex 1.5 SOLARWATT Manager rail
Supplementary products	SOLARWATT Battery vision backup booster SOLARWATT Battery vision clusterbox

DIMENSIONS

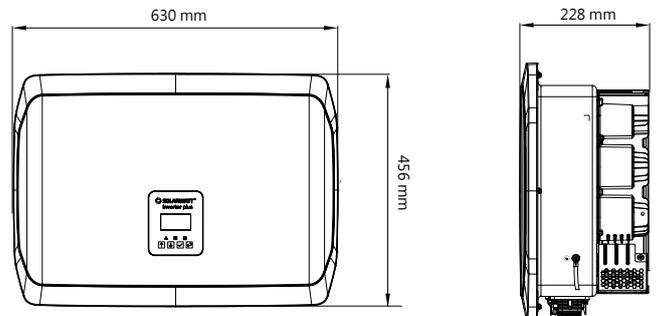

INCLUDED IN THE DELIVERY



3-phase meter DTSU 666 with
Solarwatt firmware