


PRODUCT

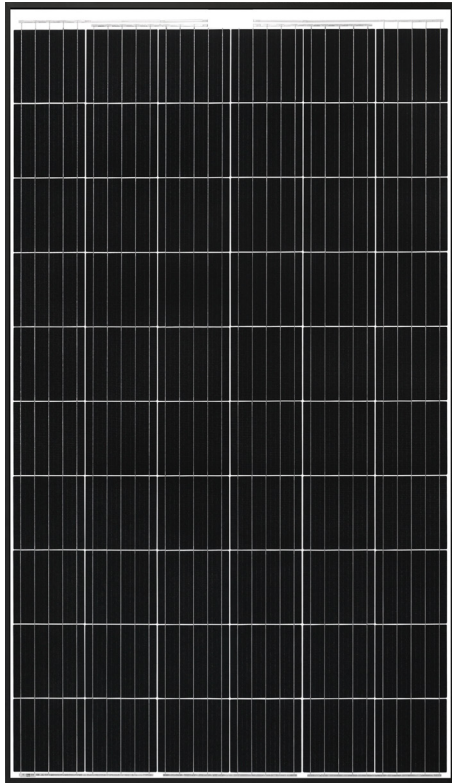

Vision 60M (slim edition) 330 Wp

Glass-glass module

Low weight with high performance

The Vision 60M (slim edition) 330 Wp is slightly thinner than other Solarwatt glass-glass panels, making it lighter in weight and therefore easier to install. The white background layer provides extra reflection of sunlight to the solar cells, which benefits the performance of the Vision 60M (slim edition).

Thanks to years of experience, the use of best components and a fully automated production process, Solarwatt's glass modules deliver the highest yields for decades. Our commitment to quality results in robust and highly resilient solar modules.

The Solarwatt FullCoverage insurance is included for 5 years and free of charge. It insures almost all risks and takes effect even if the modules do not produce electricity or deliver less than expected in the event of damage.



PRODUCT QUALITY

- 100 % plus-sorting
- ammonia resistant
- intensive hailstorm resistant

SERVICE

FullCoverage insurance
included (up to 1,000 kWp*).

Simple returns policy
as per „Delivery terms for Solarwatt solar modules“


30 Years Product Warranty
as per „Warranty conditions for Solarwatt solar modules“

30 Years Performance Warranty
on 87 % of nominal power as per „Warranty conditions for Solarwatt solar modules“

* country-specific deviations apply



DIMENSIONS

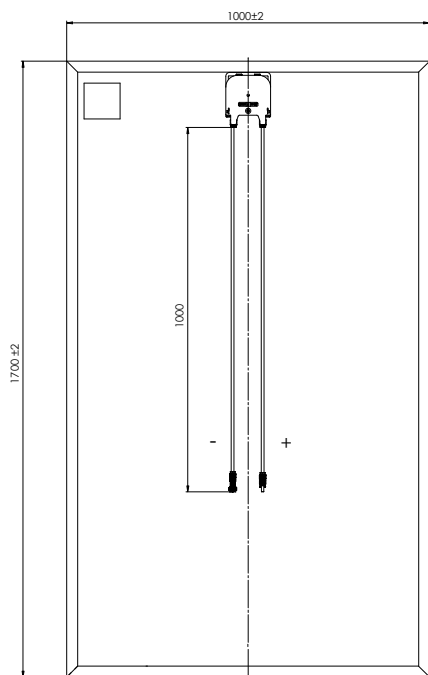

dimensions in mm

GENERAL DATA

| | |
|---|---|
| Module technology | Glass-glass laminate; aluminum frame, black |
| Covering material | Tempered solar glass with anti-reflective finish, 2 mm |
| Encapsulation | Solar cells in polymer encapsulation, white |
| Backing material | Tempered glass, 2 mm |
| Solar cells | 60 monocrystalline high power PERC-solar cells |
| Cell dimensions | 159 x 159 mm |
| L x W x H / Weight | 1,700 ^{±2} x 1,000 ^{±2} x 35 ^{±0.3} mm / appr. 22.0 ^{±0.5} kg |
| Connection technology | Cables 2 x 1.0 m / 4 mm ² Stäubli Electrical MC4-connectors |
| Bypass diodes | 3 |
| Max. system voltage | 1,000 V |
| IP rating | IP67 |
| Protection class | II (acc. to IEC 61140) |
| Fire class | C (acc. to IEC 61730/UL 790) |
| Certified mechanical ratings as per IEC 61215 | Suction load up to 2,400 Pa (test load 3,600 Pa) Pressure load up to 5,400 Pa (test load 8,100 Pa) |
| Recommended stress load as per Installation Instructions | Please refer to the specifications in the Installation Instructions and Warranty Conditions. |
| Qualifications | IEC 61215 IEC 61730 |

ELECTRICAL DATA (STC)

STC (Standard Test Conditions): Irradiation intensity 1,000 W/m², spectral distribution AM 1.5 | Temperature 25 ± 2 °C, in accordance to EN 60904-3

| | |
|---|--------|
| Nominal power P_{max} | 330 Wp |
| Nominal voltage V_{mp} | 34.1 V |
| Nominal current I_{mp} | 9.7 A |
| Open circuit voltage V_{oc} | 40.6 V |
| Short circuit current I_{sc} | 10.4 A |
| Module efficiency | 19.4 % |

Measurement tolerances: P_{max} ±5 %; V_{oc} ±10 %; I_{sc} ±10 %, I_{mp} ±10 %

Reverse-current power rating I_r: 15 A, operating modules with an external power source is only permissible if using a phase fuse with a tripping current of ≤ 15 A.

ELECTRICAL DATA (NMOT AND WEAK LIGHT)

NMOT (Nominal Module Operating Temperature): Irradiation intensity 800 W/m², spectral distribution AM 1.5, Temperature 20 °C
Weak light conditions: Irradiation intensity 200 W/m², Temperature 25 °C, Wind speed 1 m/s, load operation


| | |
|---|-------|
| Nominal power P_{max @NMOT} | 258 W |
| Measurement tolerances: P _{max} ±5 %; V _{oc} ±10 %; I _{sc} ±10 %, I _{mp} ±10 %. | |
| Reduction of module efficiency when irradiance is reduced from 1,000 W/m ² to 200 W/m ² (at 25 °C): 4 ± 2 % (relative) / -0.6 ± 0.3 % (absolute). | |

THERMAL FEATURES

| | |
|--|----------------|
| Operating temperature range | -40 ... +85 °C |
| Ambient temperature range | -40 ... +45 °C |
| Temperature coefficient P_{max} | -0.39 %/K |
| Temperature coefficient V_{oc} | -0.28 %/K |
| Temperature coefficient I_{sc} | 0.04 %/K |
| NMOT | 45 °C |

CHARACTERISTIC LINES (PERFORMANCE CLASS 330 WP)

Voltage characteristic line at different temperatures and irradiances

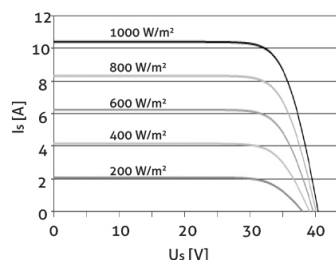

TRANSPORT AND PACKAGING

| | |
|---|--------------------------|
| Modules per pallet | 30 |
| Pallet dimensions (packing size) | 1,750 x 1,050 x 1,250 mm |
| Gross weight per pallet | ca. 695 kg (max.) |
| Pallets per truck | 15 / 30 |
| Modules per truck | 450 / 900 |